

ASBESTONE



**ASBESTOS CEMENT
P R O D U C T S**

Asbestone

Corrugated Roofing
and Siding • Pages 2-3

Asbestone

Wallboard • Page 4

**ASBESTONE
CORPORATION**

Manufacturers of
Asbestos-Cement Products
Formerly Manufactured by

R. J. DORN COMPANY
New Orleans 15, La., U.S.A.



ASBESTONE CORPORATION

formerly

R. J. DORN COMPANY


**ASBESTONE
CORRUGATED ROOFING & SIDING**

"Asbestone" Corrugated Asbestos-cement Roofing and Siding is composed of 85% Portland Cement and 15% Asbestos Fibre, proportioned by weight. The sheets are relatively smooth on the outer surface and are light cement gray in color. They are supplied in 42" widths with 10 corrugations, 4.2" c to c.

The 3.75 pounds per square foot grade is stocked in lengths from 0 to 12' in multiples of 6" and with the corrugations measuring approximately $\frac{3}{8}$ " thick at the crest and vales and $\frac{1}{8}$ " at the slopes.

"Asbestone" Corrugated Asbestos Roofing and Siding also manufactured for light weight building construction—called "Asbestone Jr.," weighing 2.25 pounds per square foot. Maximum length 10 feet. Write for catalog.

"Asbestone" erection diagrams will be made up at no extra cost on receipt of purchase order with detailed shop and field steel drawings attached.

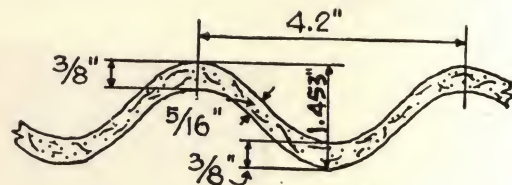

STRUCTURAL STEEL DESIGN FOR CORRUGATED "ASBESTONE" ROOFING AND SIDING Double Section Ridge Roll

NOTE: "Asbestone" is laid directly across purlins and girts.



No supporting deck is required.

Minimum roof pitch: 3" in 12".


Maximum purlin spacing: 4' 6". Maximum girt 5' 6".

End laps: 6".

Side laps: One 4.2" corrugation.

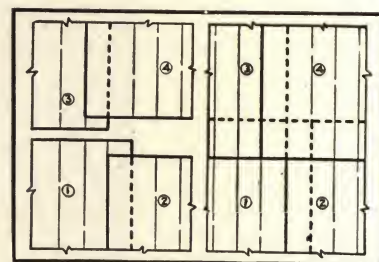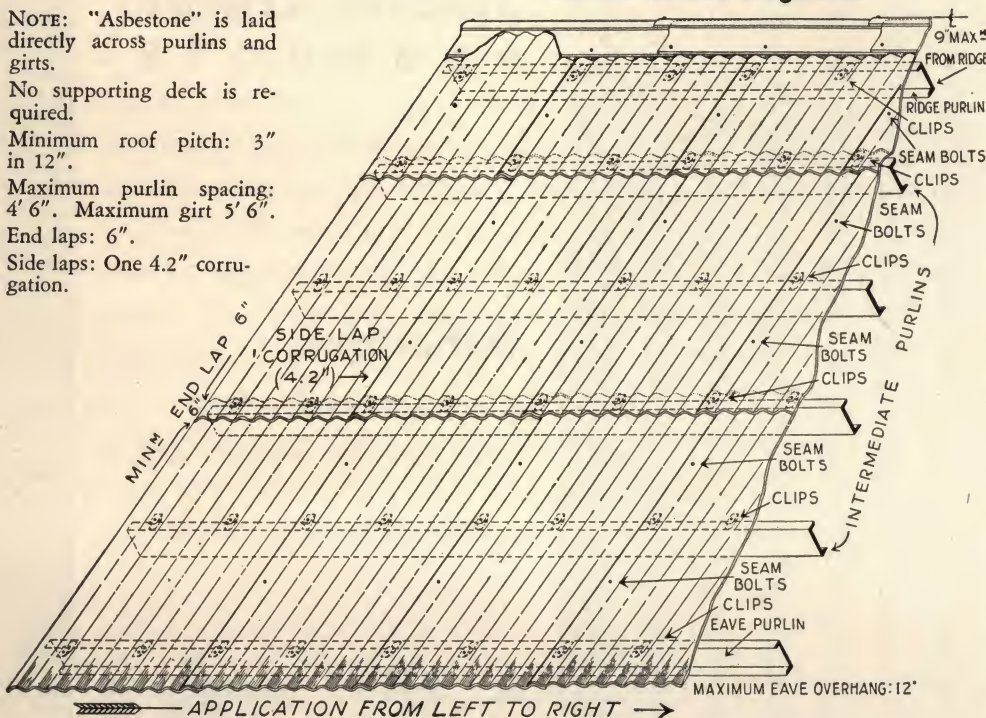

Staggered Joint Application

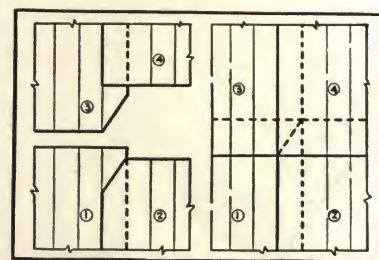

Straight Line Application

FASTENERS

The fasteners illustrated at the right will meet the conditions existing for most standard structural framing.


Bulldog Clip Assembly for use where channel purlin flanges point toward ridge and girt flanges point toward eaves. Bulldogs in reverse position can be used on intermediate purlins and girts whose flanges are opposite to positions mentioned above.

"S" Clip Assembly for end laps where purlins or girts are turned down. When ordering give size and weight of channel.

Hook Clip Assembly for end laps where angle flanges are turned down. When ordering give thickness and depth of horizontal leg.

Drive Screw Assembly for use on wood roof structures.

Seam Bolt Assembly for use in center of spans at side laps.

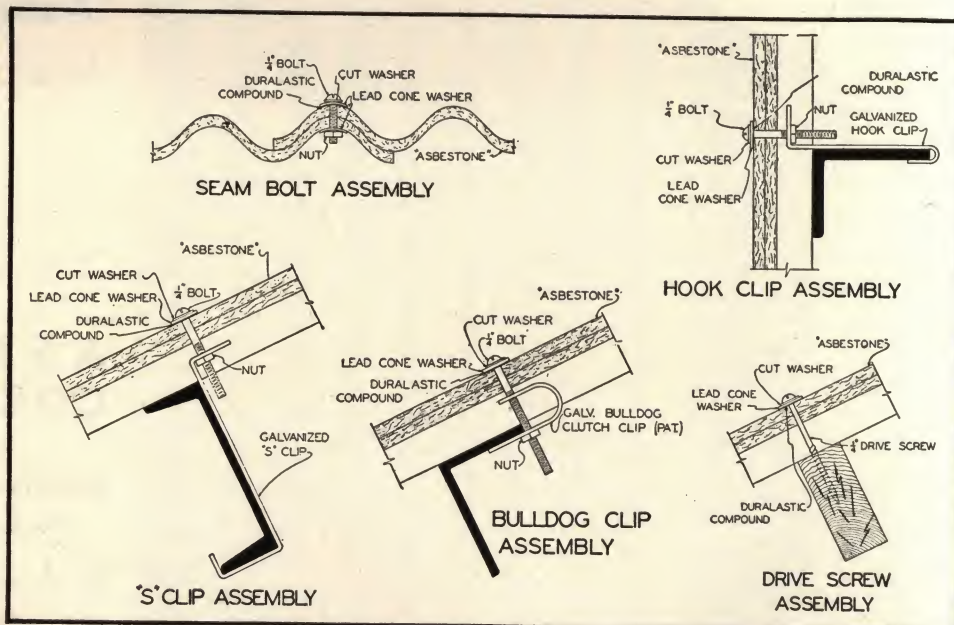

ASBESTONE

ASBESTONE CORPORATION

formerly

R. J. DORN COMPANY

**ASBESTONE
CORRUGATED ROOFING & SIDING**

TRIM, FLASHINGS AND ACCESSORIES

Ridge Roll, "Asbestone" Asbestos Cement Type "A" furnished in 4' 0" sections complete with battens and special asphalt filler strips and fasteners. Applied and fastened as indicated below.

Corner Roll, "Asbestone" Asbestos Cement, furnished in 4' 0" lengths with bell type corner roll, which provides for a 4" lap. No battens or flashing required. These corner rolls have 5½" wings measured from the tangents of the 2" radius 90° curve—7½" over-all.

Eave and gable trim, "Asbestone" asbestos-cement. Furnished in 4' 0" lengths, butted end on end—no battens required. Trim made with smooth side inside or outside.

Inside asphaltum closures can be used to seal corrugations at sash and door heads, sash sills, concrete curbs, flashings, and at the eaves of the building.


"Asbestone" "S" shape or corrugated louvre blades are made of the same materials as "Asbestone" corrugated sheets. Manufactured in lengths from 4' 0" to 8' 0" in 6" increments.

Use Gray Duralastic Compound for sealing bolt heads and caulking at sash and door jambs.


Use Black Plastic Compound for side and end laps of all roofing sheets.

8c
2

GABLE AND EAVE TRIM DETAILS

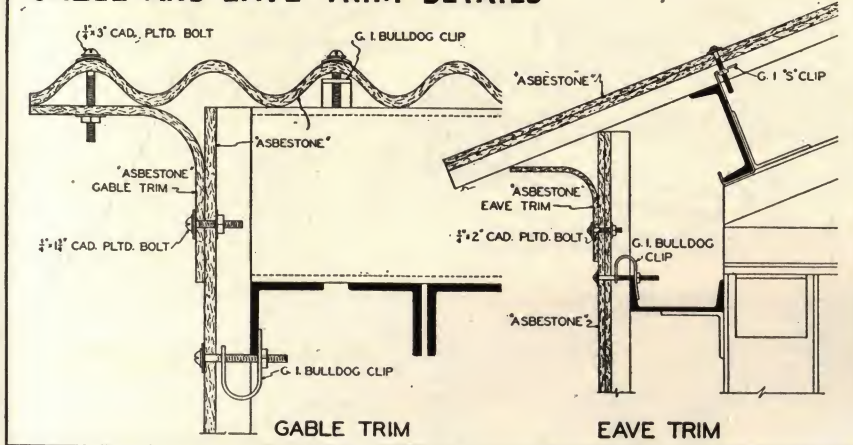


CORNER ROLL




ELEVATION
4' 0" lengths

LOUVRES

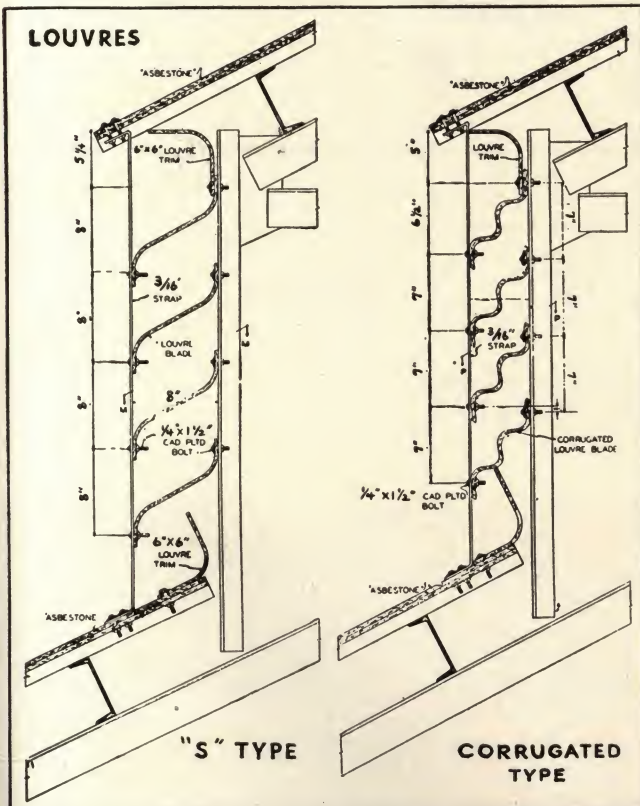


TYPE "A" RIDGE ROLL

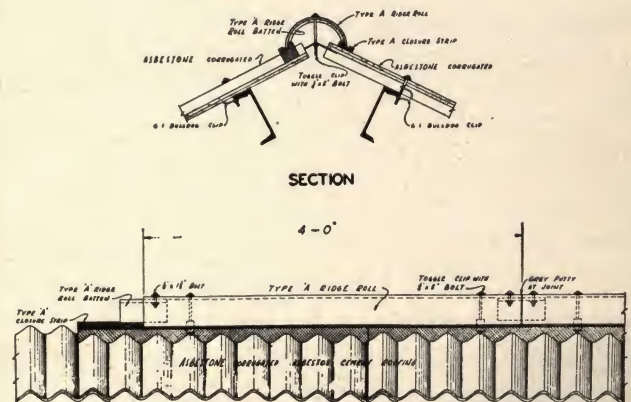

ELEVATION
Double Section Ridge Roll shown on opposite page.

ASPHALT CLOSURE STRIPS

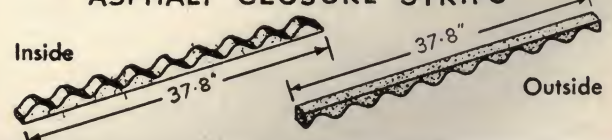

ASBESTONE

FLAT ASBESTONE WALLBOARD

With the present scarcity of lumber and other critical materials, Asbestos-cement flat sheets become increasingly important as a building material.

"Asbestone" Asbestos-cement sheets are inorganic, fire-resisting, and vermin-proof. They can be used for interior or exterior finish, for walls, partitions, ceilings, etc., and for temporary or permanent construction.

DESCRIPTION

Color—light gray.

Texture—smooth one side.

Stock size—4' x 8'.

Lengths—4', 5', 6', 7', can be furnished on special order.

Thickness and approximate weight.

$\frac{3}{16}$ "—1.8 lbs. per sq. ft.

$\frac{1}{4}$ "—2.4 lbs. per sq. ft.

Sheets are normally uncrated and unpunched. Add 10% to above weights for crating.

"Asbestone" Asbestos-cement wallboard is composed entirely of Portland Cement and Asbestos Fibre in the ratio of 85% and 15% by weight. The sheets are relatively smooth on the outer surface. No maintenance required.




RESIDENCES

Partitions—Shower Baths—Skirting—Ceilings—Interior and Exterior Walls—Garages




INDUSTRIAL AND GOVERNMENT PLANTS

Air Distribution Systems—Black-out Panels—Table Tops—Laboratories—Duct Work—Walls and Ceilings—Cantonments—Barracks

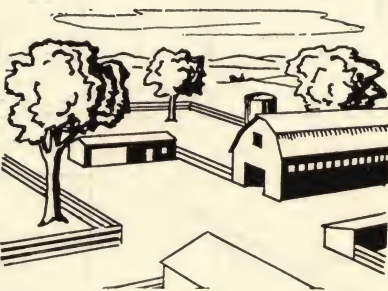


FARMS

Barns—Chicken Houses—Hog Houses—Equipment Sheds—Dairies—Partitions—Table Tops, Etc.

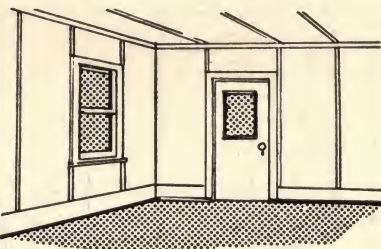

INTERIORS

for almost every use

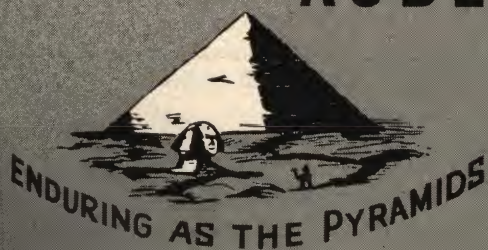

ASBESTONE CORPORATION

formerly

R. J. DORN COMPANY

New Orleans 15, La., U.S.A.

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Carol J. Dyson, AIA